


# Smart Google UHD **QLED+** Outdoor Waterproof 190 cm (75") **Direct Sun** and Ultra-Bright

## WM-ODQTV753HB4000\_GTV



- /// **DIRECT SUN:** for unlimited sun exposure
- /// Ultra-bright outdoor screen up to **4000 cd/m<sup>2</sup>**
- /// Waterproof: **IP55** rating
- /// All-season: internal temperature control
- /// Ultra-slim design: less than 8.4 cm thick
- /// Ultra-high-resolution QLED+ UHD display with 3840 x 2160 pixels
- /// Google TV 3.0
- /// DVB-T/T2/C/S2 tuners (H.264/H.265 compatible)
- /// Waterproof speakers: 2 x 15W / 8 Ohms

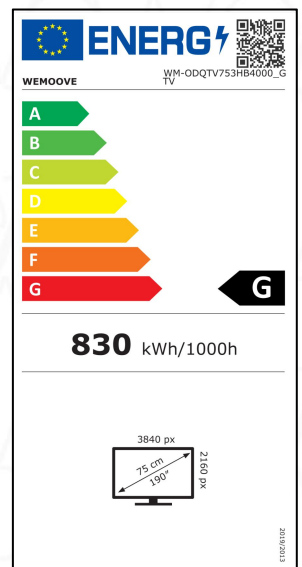

# Technical Specifications

## /// General Information

- TV dimensions (WxHxD): 1678.6 x 958 x 88.2 mm
- Screen dimensions (WxH): 1649.7 x 928.3 mm
- Voltage: AC 110–240 V
- Power consumption (Max): <830 W
- Energy efficiency class: G
- Installation method: wall-mounted using a VESA 600x400 mount

## /// Screen specifications

- Screen diagonal: 190 cm (75")
- Screen resolution: UHD / 4K (3840 x 2160 pixels)
- Screen technology: QLED+
- Backlight technology: QLED+ for color gamut coverage exceeding 115%
- Contrast ratio: 1200:1
- Number of colors: 1.07 billion colors
- Brightness: up to 4000 cd/m<sup>2</sup> for a visible image even in direct sunlight
- **Direct Sun** technology
- Screen design: Frozen Black Aluminum
- Wide viewing angle (H/V): 178°/178°
- IP rating: IP55
- Operating temperature: between -25°C and +65°C

## /// Multimedia

- Built-in multimedia USB port: plays video, photo, and music files from a USB flash drive or multimedia hard drive
- Supported video/audio/photo/text formats: **video:** MPEG-2, MPEG-4, AVC/H.264, H.265, AVS; **audio:** MP3, AC3, AAC, HE-AAC, LPCM, DRA; **photo:** \*.JPG, \*.BMP, \*.PNG, \*.GIF, \*.WEBP, \*.MPO, \*.JPS, \*.PNS

## /// Connectors

- Connectors integrated into a multimedia compartment •
- 1 TV antenna jack (75 ohms)
  - 1 DVB-S2 satellite antenna jack
  - 1 audio-video input (CVBS/Audio L/Audio R)
  - 1 mini YPbPr component input
  - 3 HDMI ports: 3x 2.0 (CEC, 1x EARC)
  - 2 USB 2.0 multimedia ports
  - 1 RJ45 port
  - 1 Common Interface (CI) slot
  - 1 headphone jack (3.5mm)
  - 1 optical audio output (SPDIF)
  - 1 IP66-rated waterproof power connector (AC 110–240 V)

## /// Features

- Digital tuner: DVB-T/T2/C/S2 (H.264/H.265 – HEVC compatible)
- *\*Allows reception of free satellite channels but does not decode satellite channels that require a decryption card*
- Audio: 2 built-in speakers
- Audio power: 2 x 20W built-in subwoofer / 8 Ohms
- Bluetooth: Bluetooth V5.0 compatible

## /// Smart GOOGLE TV

- Operating system: GOOGLE TV 3.0
- Processor: RDT2851 A\*S, ARM Cortex-A55 architecture, max frequency 1.3 GHz
- Graphics processor: Dual-core Mali-G31\*2 clocked up to 800 MHz
- ROM: 2 GB
- Flash memory: 16 GB
- Network:
  - Internet connection: 10/100 Mbps RJ45 LAN with auto-negotiation and DHCP, or 2.4 GHz/5 GHz Wi-Fi, IEEE 802.11 a/b/g/n/ac @2.4GHz/5GHz
- Pre-installed apps: Google TV, Netflix, YouTube, Prime Video, Miracast TV screen mirroring, media player

## /// Accessories

- Remote control: non-waterproof Bluetooth, AAA batteries not included
- User manual and installation guide
- Warranty certificate
- 2 handles for easy installation
- IP66-rated waterproof power cord
- Wall mounting hardware and multimedia compartment

## /// Shipping Information

- EAN code: 3760343520548
- Dimensions with packaging (WxHxD): 1853 x 1131 x 250 mm
- Gross weight with packaging: 71 kg
- Net weight: 51 kg

## /// Warranty

- Warranty: 2 years
- Spare parts availability period: 2 years

## /// Standards

- TV: CE, ROHS, LVD, RED






# IP Protection Ratings

\*IP 55 rating

| Indice | 1 <sup>er</sup> chiffre (dizaine)<br>Protection contre les solides. | 2 <sup>e</sup> chiffre (unité)<br>Protection contre l'intrusion d'eau.   |
|--------|---|--|
| 4      | Protégé contre les corps solides supérieurs à 1 mm.                 | Protégé contre les projections d'eau de toutes directions.<br>L'eau projetée de toutes les directions sur l'enveloppe ne doit pas avoir d'effets nuisibles <sup>5</sup> .  |
| 5      | Protégé contre les poussières et autres résidus microscopiques.     | Protégé contre les jets d'eau de toutes directions à la lance (buse de 6,3 mm, distance 2,5 à 3 m, débit 12,5 l/min ± 5 %).<br>L'eau projetée en jets de toutes les directions sur l'enveloppe ne doit pas avoir d'effets nuisibles <sup>5</sup> . |

**Mounts made of waterproof materials and stainless steel are available for this model**

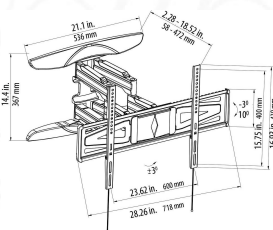

| Model                    | / Articulated Wall Mount   | / Non-Articulated Wall Mount   | / Ceiling Mount   |
|--------------------------|--|--|---|
| Description              | Waterproof tilting mount made of stainless steel, with an aluminum arm, black. Max. load 70 kg | Waterproof, non-articulated stainless steel wall mount, black. Max. load 90 kg | Height-adjustable, tilting, and swiveling ceiling mount with adjustable ceiling plate for flat or sloped ceilings, black. Max. load 70 kg |
| Extension                | 58.4 to 469.9 mm   | -  | 722.5 to 1220 mm  |
| Tilt                     | From -3° to +10° (180° swivel)   | From 0° to +10°  | From -15° to +15°   |
| Weight without packaging | 10.8 kg  | 3.62 kg  | 4.38 kg   |
| Weight with packaging    | 12 kg  | 3.85 kg  | 5.22 kg   |
| Package dimensions       | H762 x W421.6 x D94 mm   | H863.6 x W215.9 x D63.5 mm   | H812.8 x W247.65 x D101.6 mm  |